





Voltage Hextupler (Sextupler)
 Section Supplementary TEST H.T.
 Pulse Supply Section. This circuit
 is meant to be re-enforced by an
 external supply if needed.

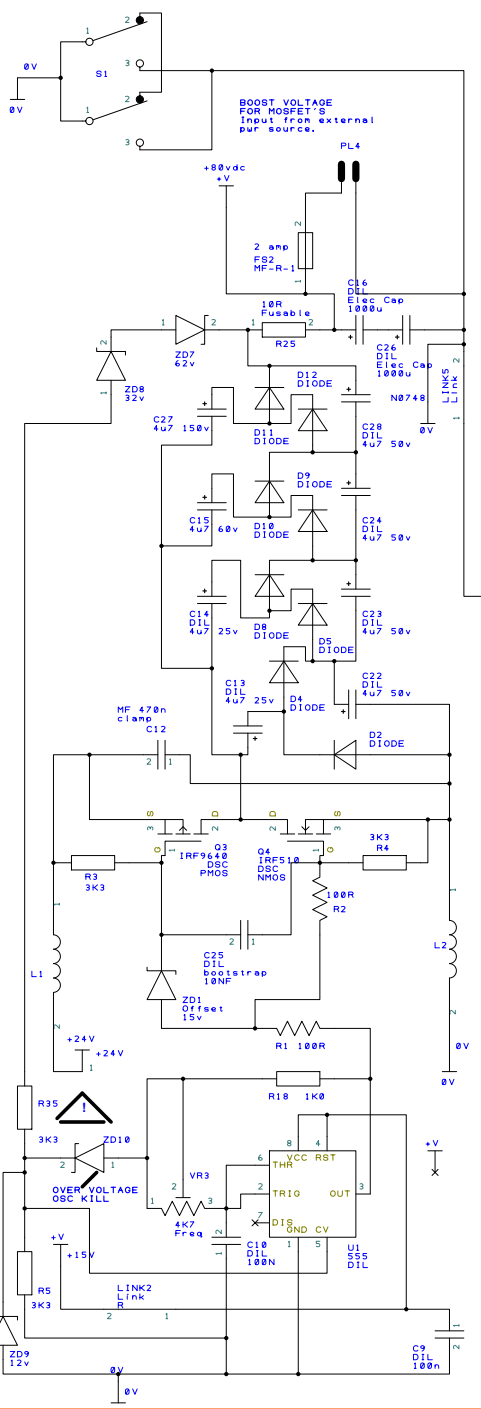

PROTOTYPE

The Output Pulse goes into a 4ohm load
 wound with 150 turns of 28 SWG wire
 to change the polarity of alnico magnets.

80 VDC MAX INPUT

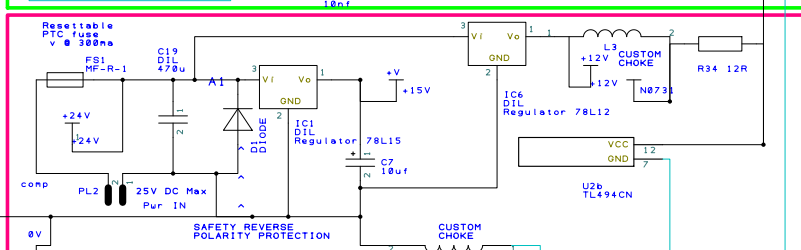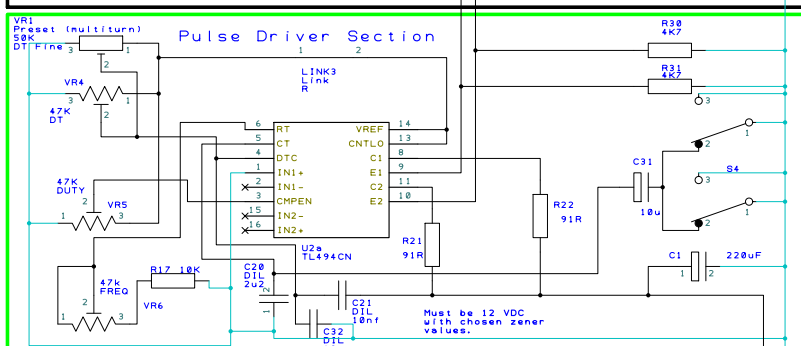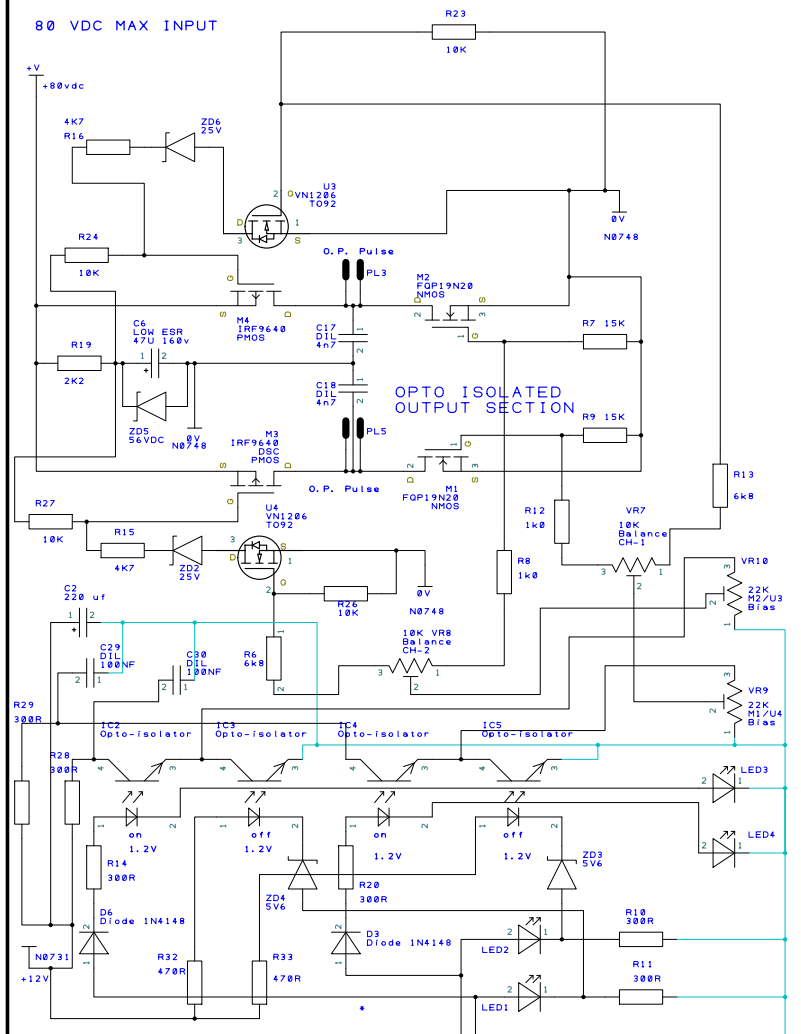

LOW POWER SECTION
 REGULATED SUPPLY

NOTICE: Custom Chokes are applied to PCB layout and are
 to inhibit noise 2x 11 turns in counter force mode wound on Green
 10mm small donut torroid's.